

# X2-3200G

PROVIDES THE DATA THAT COUNTS FOR NETWORK MONITORING

AGGREGATION, REPLICATION, L2-L4 FILTERING, LOAD BALANCING, PACKET SLICING, TIMESTAMPING

The Profitap X2-3200G is a high-end, high-density Network Packet Broker with a total throughput of 3.2 Tbps, offering packet slicing, timestamping, GRE de-tunneling, VXLAN de-tunneling, ERSPAN tunneling and de-tunneling, and many more features.

Featuring 32 QSFP28 ports (40/100 Gbps) the X2-3200G provides aggregation, replication, powerful filtering and load balancing in very high bandwidth port monitoring and analysis scenarios, all in a single 1U rack unit.



## KEY BENEFITS

- All X2-Series advanced features operate simultaneously at wirespeed without the need for a co-processor.
- Up to 6000 non-conflicting rules: no conflict between new and existing rules.
- Only 1 rule consumed per port range filter.
- High performance and throughput in a compact, high density footprint.
- Optimize traffic and deliver actionable data to monitoring and security tools.
- Leverage existing infrastructure for a cost-effective increase in capabilities.
- Advanced integration with physical and virtual traffic access, analysis, and security systems.

## KEY FEATURES



### AGGREGATION

Aggregate traffic coming from multiple incoming links.



### REPLICATION

Replicate traffic to multiple monitoring and security tools.




### FILTERING

Only send actionable data to each of the connected tools.



### LOAD BALANCING

Balance traffic over multiple monitoring and security tools.



### PACKET SLICING

Remove payload that is irrelevant to network monitoring and security analysis, conserving disk space and load on capture devices.



### TIMESTAMPING

Leverage accurate timing information for accurate forensic analysis, and legal and criminal investigation.



### GTP IP FILTERING

Filter by IP in GTP sessions based on information contained in the data stream, identifying source and destination.



### ERSPAN TUNNELING & DE-TUNNELING

Integrate the X2-3200G as a single, centralized point for ERSPAN tunneling and de-tunneling in a monitoring system based on data ERSPAN encapsulation.



### PACKET DEDUPLICATION

Optimize network efficiency and traffic storage eliminating redundant packet copies.

## USE CASES

- Balance traffic over multiple monitoring and security tools: allows incoming traffic to be distributed evenly and dynamically across multiple output ports.
- Replicate traffic to multiple monitoring and security tools: outputs copies of incoming traffic to multiple output ports.
- Aggregate multiple traffic streams into higher speed links.
- Filter specific parts of the traffic based on a wide array of allow and drop rules to ensure the appropriate traffic is sent to the appropriate tools.
- Optimize bandwidth & storage utilization and ensure security compliance by removing payload (packet slicing) irrelevant for network analysis.
- Remove packet duplicates and provide a substantial reduction in data traffic volume.
- Filter on IP-based communication in GTP sessions.
- Improve quality of latency analysis with accurate timestamps for every network packet.

## TECHNICAL SPECIFICATIONS

### CONNECTORS

32 x 100GbE QSFP28 ports  
2 x 10GbE SFP+ I/O ports  
1 x RJ45 management port  
1 x RJ45 console port  
1 x USB 2.0 port

### DIMENSIONS (WxDxH)

440 x 430 x 44 mm — 17.32 x 16.93 x 1.73 in

### INCLUDED ACCESSORIES

2 x 550 W, 80+ Platinum, 100–240 VAC, 50–60 Hz PSUs  
2 x C13 AC power cords — 1 x RJ45 to serial port adapter  
1 x Rack mounting kit

### LEDS

1 x System status  
1 x Fan status  
1 x PSU1 status  
1 x PSU2 status

### WEIGHT

9.1 kg — 20 lbs

### COMPLIANCE

RoHS  
CE  
FCC

## HIGHLIGHTS

- Aggregation, replication, L2-L4 filtering, VLAN tagging and stripping, MPLS stripping and load balancing (any-to-any, any-to-many, many-to-many)
- Up to 6000 port-to-port filters
- Local and remote management (CLI, SSH, GUI, SNMP, Syslog, TACACS+ / RADIUS authentication)
- Centralized authentication via Profitap Supervisor (local users, TACACS+, RADIUS)
- Configuration automation with Ansible
- RESTful API support
- Flexible role-based management access
- In-line mode and in-line tool sharing
- PTPv2 time synchronization
- Supports 40G, 100G
- Up to 128 x 10/25G SFP28 or 64 x 50G SFP56 logical ports via fanout cables
- Redundant, hot-swappable PSUs and fan modules

## ORDER REFERENCES

Base licenses cover the following key features: Aggregation, Replication, L2-L4 filtering, GTP IP filtering, Load balancing, Packet slicing, Timestamping (ERSPAN), VLAN tagging, VLAN stripping, VXLAN de-tunneling, GRE de-tunneling and ERSPAN tunneling and de-tunneling.

### BASE LICENSE

X2-3200G-16-AC  
X2-3200G-32-AC  
X2-3200G-UNLK

### DESCRIPTION

HD NPB, 16 x 40G/100G QSFP28, 2 x 550W, 100–240 VAC PSUs  
HD NPB, 32 x 40G/100G QSFP28, 2 x 550W, 100–240 VAC PSUs  
HD NPB, upgrade from half port to full port license

### ADVANCED LICENSABLE FEATURES

X2-3200G-LIC-D

De-duplication license


### WARRANTY AND MAINTENANCE

X2-3200G-WAR-1YR  
X2-MAIN-1YR

X2-3200G extended warranty — 1 year  
X2-3200G extended maintenance — 1 year (software updates, professional support)




X2-Manager is a web-based interface integrated in every X2-3200G unit, allowing easy access to the configuration and monitoring of X2-3200G settings and behavior from any OS or platform.

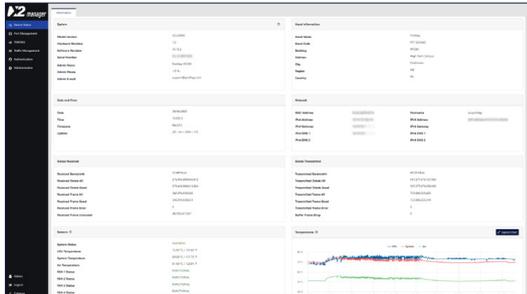


**DEVICE STATUS**

Device status offers a quick overview of operational statistics related to the packet broker hardware. Measured temperatures are recorded with a history of 72 hours, to allow filtering back in time on temperature statistics.

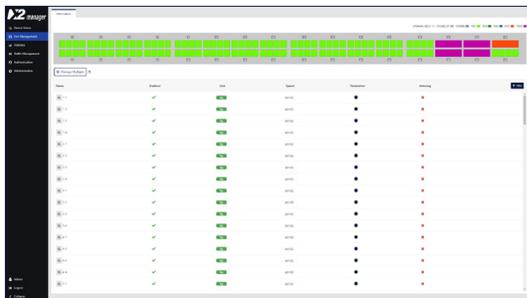


**PORT MANAGEMENT**

Port management offers instant overview of port status and speed. Users control the configuration of all QSFP modules, where each module offers additional information in the specific status section.

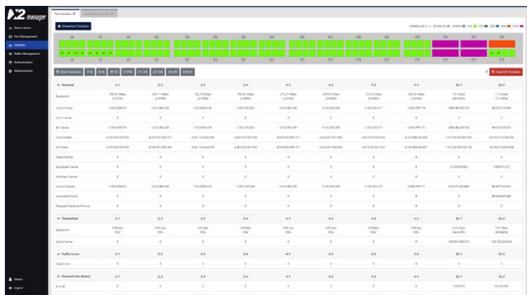

**PORT STATISTICS**

Port statistics displays and monitors the statistics counter for each of the device interfaces. Users can view or export this information for a later analysis. It is also possible to easily compare the traffic bandwidth on each port.

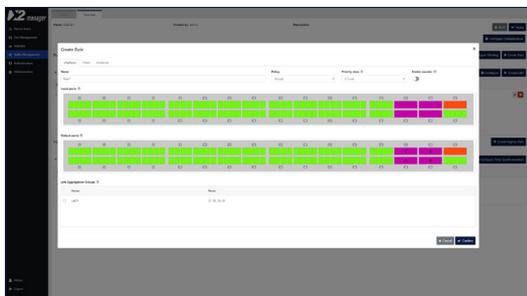

**TRAFFIC MANAGEMENT**

Define how the traffic will flow through the device interfaces. Using a direct control interface the user will be able to define aggregation, duplication and filtering rules. Advanced actions can be defined to manipulate the traffic, adding label information or stripping undesired headers.